


ECAT-2060

The ECAT-2060 is an industrial slave I/O module built in 6 digital inputs and 6 relay digital outputs. It is equipped with the EtherCAT* protocol and installed by daisy chain connection that provides a more scalable system with fewer wires. Users can obtain the input and output status not only via the process data but also from its LED indicators. The ECAT-2060 has passed and verified by the conformance test tool, therefore eligible EtherCAT Master or configurator can manipulate it simply and implement your various applications easily.


* EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

- On the fly processing: EtherCAT
- Powerful MCU handles efficient network traffic
- 2 x RJ-45 bus interface
- Distance between stations up to 100 m (100BASE-TX)
- Support daisy chain connection
- EtherCAT conformance test tool verified
- Removable terminal block connector
- LED indicators for the I/O status
- Built-In Inputs and Outputs: 6 DI and 6 Relay DO
- RoHS compliant
- ESD Protection 4 KV Contact for each channel

Pin Assignment

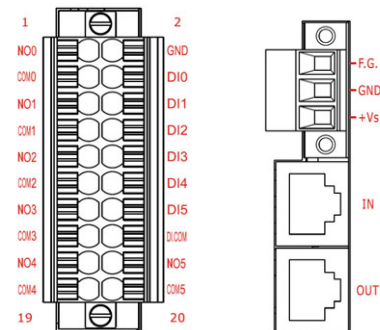

Application

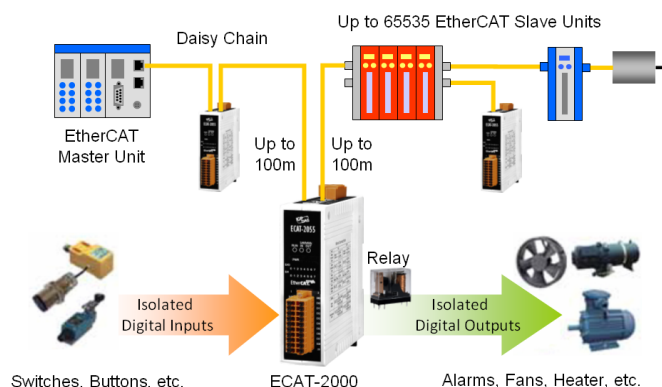

Wire connection

Input	ON	OFF
Relay Contact (Dry)		
Open Collector (Dry)		
Relay Contact (Wet)		
NPN Output (Wet)		
Output	ON	OFF
Relay		

Digital Input		
Channels	6	
Input Type	Dry (Source)	Wet (Sink/Source)
OFF Voltage Level	Open	+4 V Max.
ON Voltage Level	Close to GND	+10 V ~ +50 V
Photo-Isolation	3750 VDC	
Digital Output		
Channels	6	
Output Type	Form A (SPST-NO)	
Contact Rating (Resistive Load)	5A@30VDC; 5A@125/250VAC(47~63Hz)	
Operate Time	10 ms Max.	
Release Time	5 ms Max.	
Mechanical Endurance	2 x 10 ⁷ Operations	
Electrical Endurance	10 ⁵ Operations	
Communication Interface		
Connector	2 x RJ-45	
Protocol	EtherCAT	
Distance between Stations	Max. 100 m (100BASE-TX)	
Data Transfer Medium	Ethernet/EtherCAT Cable (Min. CAT 5), Shielded	
Power		
Input Voltage Range	10V ~ 30VDC	
Power Consumption	Max. 4W	
Mechanism		
Installation	DIN-Rail	
Dimensions	110mm x 90mm x 33mm (H x W x D, without connectors)	
Case Material	UL 94V-0 Housing	
Environment		
Operating Temperature	-25°C ~ 75°C	
Storage Temperature	-30°C ~ 80°C	
Relative Humidity	10 ~ 90%, No Condensation	
ESD (IEC 61000-4-2)	4 KV Contact for Each Channel	
EFT (IEC 61000-4-4)	Signal: 1 KV Class A; Power: 1 KV Class A	
Surge (IEC 61000-4-5)	1 KV Class A	

ECAT-2060 CR

EtherCAT Slave I/O Module with Isolated 6-ch DI and 6-ch Relay DO (RoHS) **Art. No. 141426**